



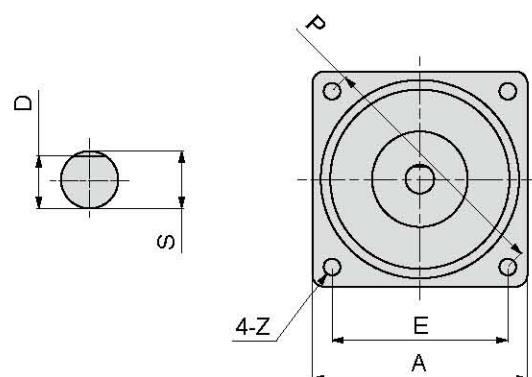

AC 馬達 (IK/RK)

IK 馬達適用於連續運轉。
RK 馬達為可瞬間切換馬達運轉
方向 (30 分鐘額定)。

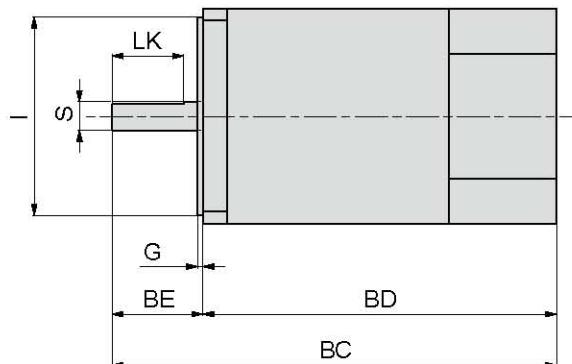


尺寸表 (mm)

型號	馬力 (W)	A	BC	BD	BE	I	G	P	Z	E	軸 端			重量 (KG)
											LK	S	D	
2	6W	60	100	76	24	54	2.2	70	5	49.5	18	6	5.2	0.8
3	15W	70	112	80	32	64	2.2	82	6	58	25	6	5.2	1.1
4	25W	80	118	86	32	73	2.2	94	7	66.5	25	8	7	1.5
5	40W	90	144	106	38	83	2.2	104	7	73.6	30	10	9	2.4
	60W	90	163	125	38	83	2.2	104	7	73.6	30	12	11	2.5
	90W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.3
	120W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.3
	150W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.3

- 120W 以上 30 分鐘額定

"額定時間" 指馬達連續運轉到此時間需先停止，
待冷卻後才能使用，否則有燒毀之危險。

符合歐洲安全規範，
可指定防護等級 IP 54。

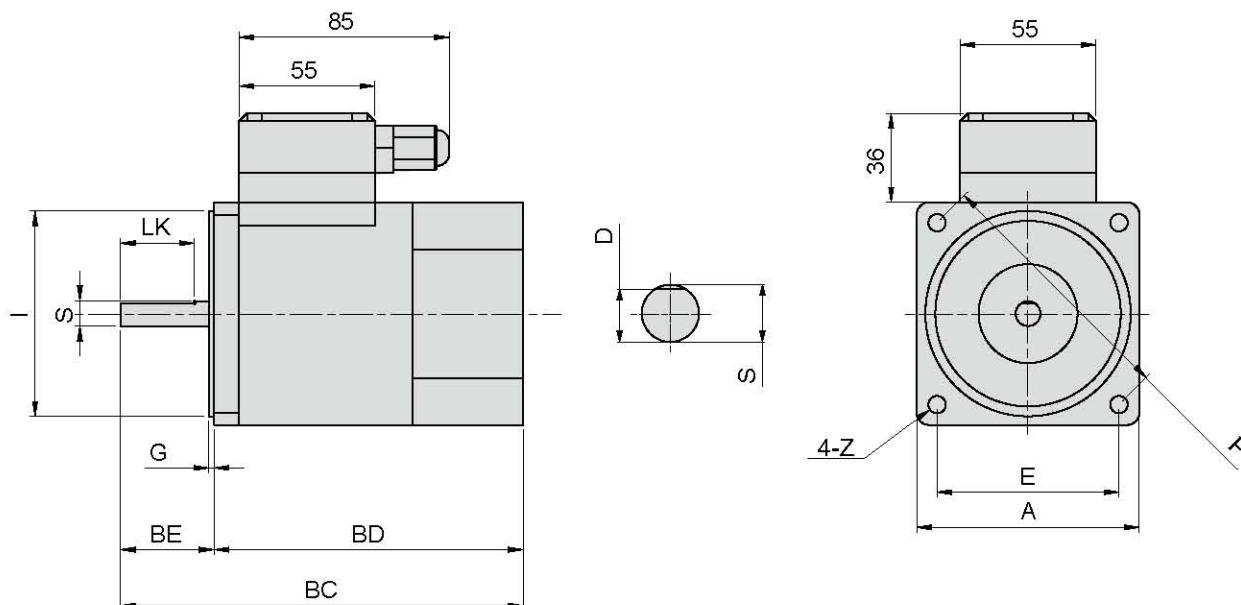


尺寸表 (mm)

型號	馬力 (W)	A	BC	BD	BE	I	G	P	Z	E	軸 端			重量 (KG)
											LK	S	D	
2	6W	60	100	76	24	54	2.2	70	5	49.5	18	6	5.2	1.02
3	15W	70	112	80	32	64	2.2	82	6	58	25	6	5.2	1.38
4	25W	80	118	86	32	73	2.2	94	7	66.5	25	8	7	1.6
5	40W	90	144	106	38	83	2.2	104	7	73.6	30	10	9	2.78
	60W	90	163	125	38	83	2.2	104	7	73.6	30	12	11	2.78
	90W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.65
	120W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.65
	150W	90	186	148	38	83	2.2	104	7	73.6	30	12	11	3.65


※ RK: 30 分鐘額定時間。 ■ 120W 以上 30 分鐘額定

馬達搭配減速機



6W

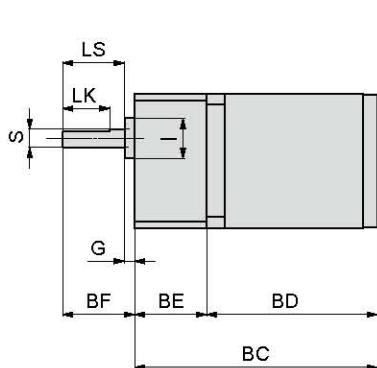

15W-40W


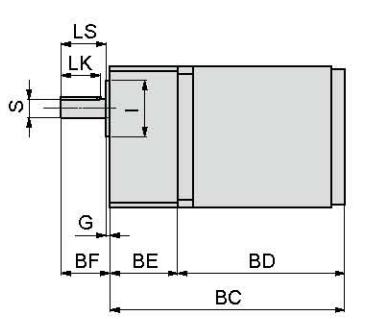


60W

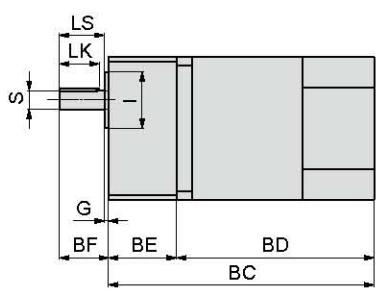

尺寸表 (mm)

型號	馬力 (W)	樣式	A	BC	BE	BD	BF	CC	I	G	P	Z	E	軸 端			
														LS	S	D	WxYxLK
2	6W (GN)	3~18 比	60	108	32	76	32	10	18	4.5	70	M4	49.5	27	8	7	--
		20~180 比		118	42												
3	15W (GN)	3~18 比	70	112	32	80	32	15	30	2	82	M5	58	27	10	7.5	4x4x25
		20~180 比		122	42												
4	25W (GN)	3~18 比	80	122	36	86	32	15	34	2.5	94	M5	66.5	28	10	7.5	4x4x25
		20~180 比		136	50												
5	40W (GN)	3~18 比	90	149	43	106	32	18	34	2.5	104	M6	73.6	30	12	9.5	4x4x25
		20~180 比		165	59												
	60W (GN)	3~18 比	90	168	43	125	32	18	34	2.5	104	M6	73.6	30	12	9.5	4x4x25
		20~180 比		184	59												

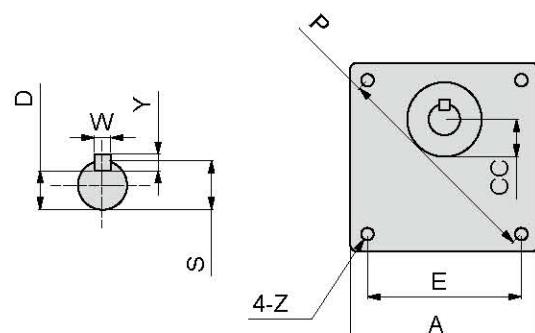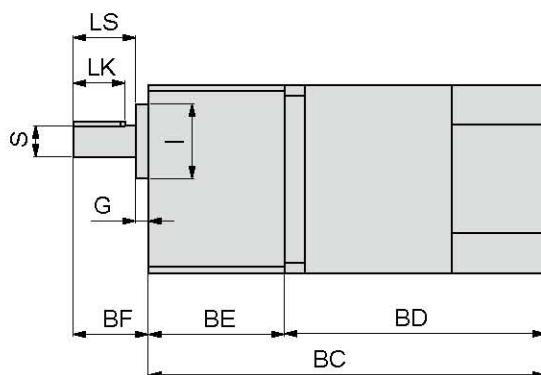


尺寸表 (mm)

型號	馬力 (W)	A	BC	BE	BD	BF	CC	I	G	P	Z	E	軸 端			
													LS	S	D	WxYxLK
5 (GU)	60W	90	190	65	125	36	18	34	6	104	M6	73.6	30	15	12	5x5x25
	90W	90	213	65	148	36	18	34	6	104	M6	73.6	30	15	12	5x5x25
	120W	90	213	65	148	36	18	34	6	104	M6	73.6	30	15	12	5x5x25
	150W	90	213	65	148	36	18	34	6	104	M6	73.6	30	15	12	5x5x25


■ 120W 以上 30 分鐘額定

L 形腳架


PAL-3N(70mm 用)

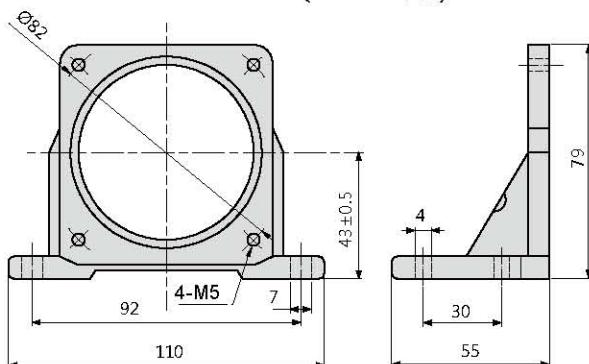

PAL-4N(80mm 用)

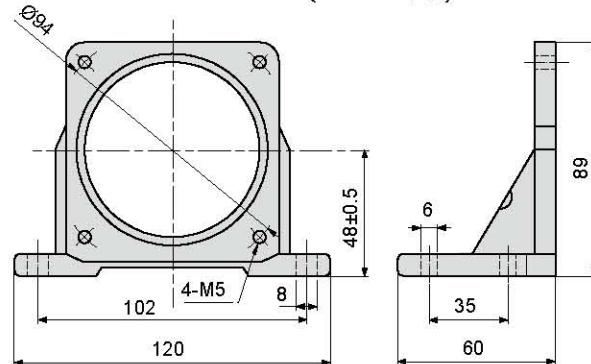




PAL-5N(90mm 用)

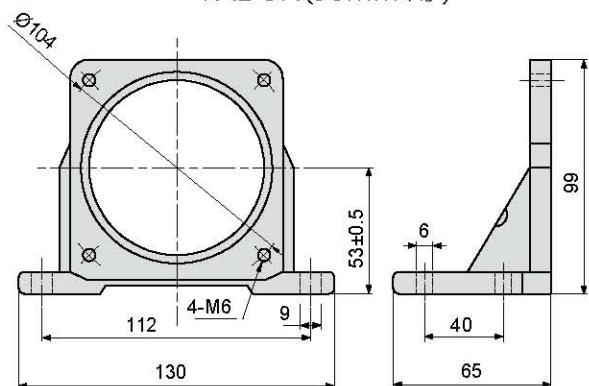



離合器煞車馬達

定位精準，適合高頻率
啟動 / 停止機構。

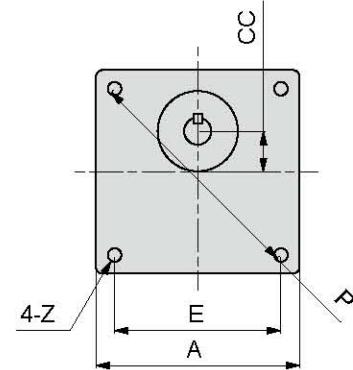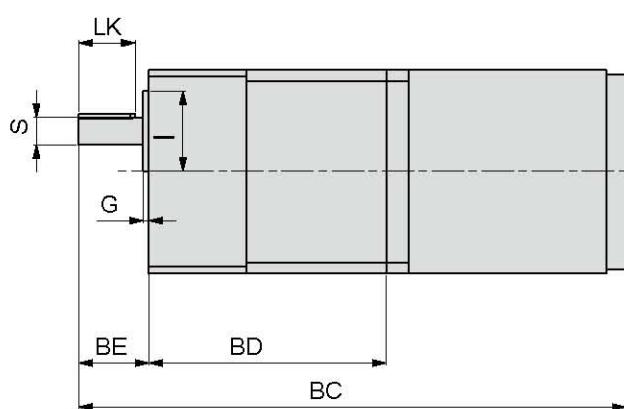

尺寸表 (mm)

型號	馬力 (W)	A	BC	BD	BE	I	G	P	Z	E	CC	軸 端			重量 (KG)	
												S	D	WxYxLK		
5	40W (GN)	3~18 比	90	246	105	35	34	2.2	104	M6	73.6	18	12	9.5	4x4x25	5.52
		20~180 比	90	262	121	35	34	2.2	104	M6	73.6	18	12	9.5	4x4x25	5.54
	60W (GN)	3~18 比	90	265	105	35	34	2.2	104	M6	73.6	18	12	9.5	4x4x25	5.52
		20~180 比	90	281	121	35	34	2.2	104	M6	73.6	18	12	9.5	4x4x25	5.54
	60W(GU)		90	287	127	35	34	2.2	104	M6	73.6	18	15	12	5x5x25	5.54
	90W(GU)		90	313	127	38	34	2.2	104	M6	73.6	18	15	12	5x5x25	6.39
	120W(GU)		90	313	127	38	34	2.2	104	M6	73.6	18	15	12	5x5x25	6.39

※ RK: 30 分鐘額定時間 ■ 120W 以上 30 分鐘額定





調速馬達

無段變速系統，適用於單相馬達作速度控制，速度控制範圍：

90-1400 rpm/min (50Hz)

90-1600 rpm/min (60Hz)

註：三相馬達作速度控制時需用變頻器。

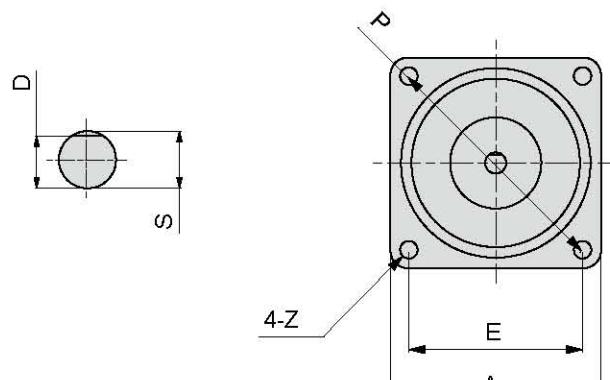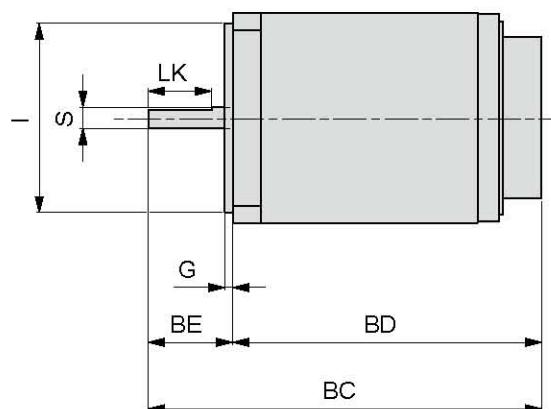


尺寸表 (mm)

型號	馬力 (W)	A	BC	BD	BE	I	G	P	Z	E	軸 端			重量 (KG)
											LK	S	D	
2	6W	60	112	88	24	54	2.2	70	5	49.5	18	6	5.2	0.9
3	15W	70	124	92	32	64	2.2	82	6	58	25	6	5.2	1.6
4	25W	80	130	98	32	73	2.2	94	7	66.5	25	8	7	2.5
5	40W	90	156	118	38	83	2.2	104	7	73.6	30	10	9	2.6
	60W	90	175	137	38	83	2.2	104	7	73.6	30	12	11	3.4
	90W	90	200	162	38	83	2.2	104	7	73.6	30	12	11	3.4
	120W	90	200	162	38	83	2.2	104	7	73.6	30	12	11	3.4
	150W	90	200	162	38	83	2.2	104	7	73.6	30	12	11	3.4

※ RK:30 分鐘額定時間。

適用於緊急煞車作業，具定位保持功能。
馬達在斷電時，會瞬間停止並具有負載
保持力。

適用於垂直升降機構無激磁電動煞車。

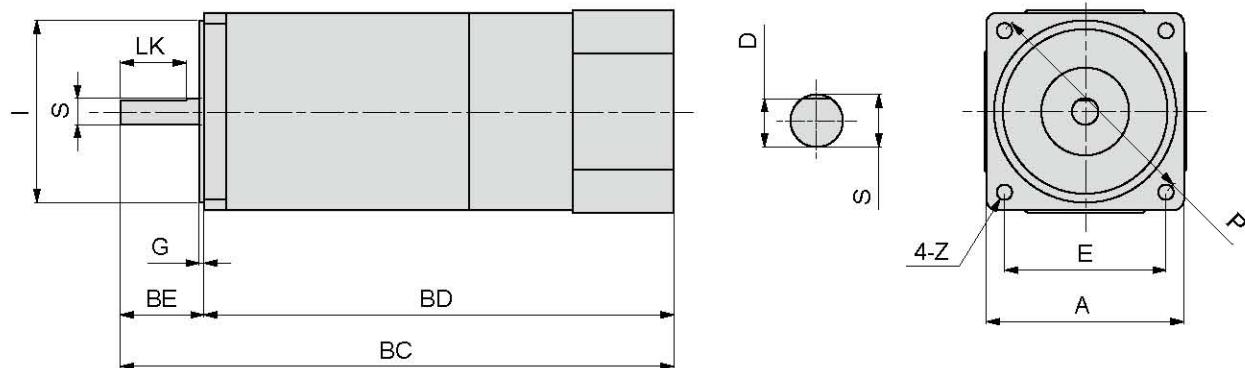

尺寸表 (mm)

型號	馬力 (W)	A	BC	BD	BE	I	G	P	Z	E	軸 端			重量 (KG)
											LK	S	D	
2	6W	60	152.5	128.5	24	54	2.2	70	5	49.5	18	6	5.2	1
3	15W	70	164.2	132.2	32	64	2.2	82	6	58	25	6	5.2	1.5
4	25W	80	169.2	137.2	32	73	2.2	94	7	66.5	25	8	7	2
5	40W	90	200.5	162.5	38	83	2.2	104	7	73.6	30	10	9	3
	60W	90	226.5	188.5	38	83	2.2	104	7	73.6	30	12	11	3.3
	90W	90	251.9	213.9	38	83	2.2	104	7	73.6	30	12	11	4
	120W	90	251.9	213.9	38	83	2.2	104	7	73.6	30	12	11	4

※ RK: 30 分鐘額定時間。 ■ 120W 以上 30 分鐘額定