


TA 圖解（Dimension diagram）：

MODEL:TA

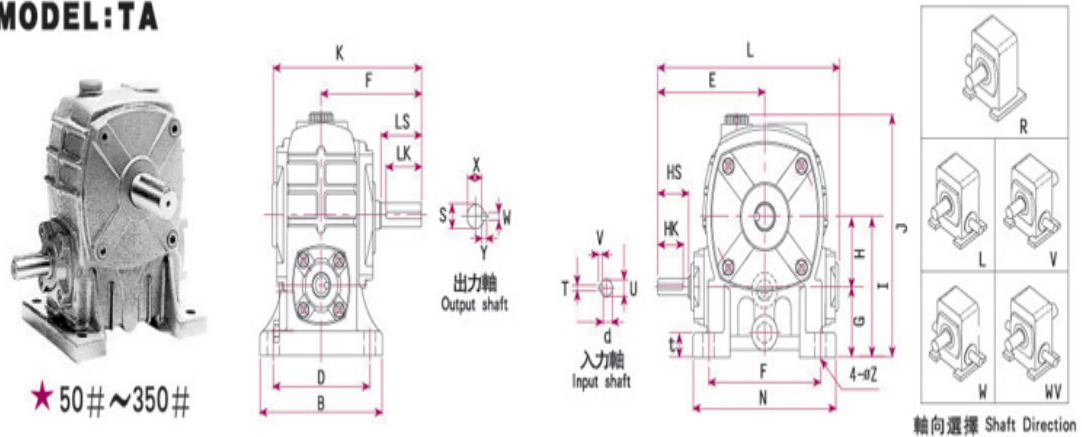

TA 尺寸（Dimensions）：

尺寸表 Dimension


單位: mm

減速比 RATIO	馬力 HP		腳座 FOOT STOCK							外形尺寸 OUTWARD SIZE										入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT			
			A	B	C	D	t	Z	E	F	G	H	I	J	K	L	HS	U	d	T×V×HK	LS	S	X	W×Y×LK			
50	1/4	1/8	140	120	110	95	18	11	104	92	50	50	100	180	145	175	30	14	11.5	5x5x25	40	17	14	5x5x35			
60	1/2	1/4	150	130	120	105	20	11	119	111	60	60	120	210	165	195	40	15	12	5x5x35	50	22	18	7x7x45			
70	1	1/2	190	150	150	115	22	15	134	130	70	70	140	245	196	235	40	18	15	5x5x35	60	28	24	7x7x55			
80	2	1	220	170	180	135	23	15	157	145	80	80	160	280	217	265	50	22	18	7x7x45	65	32	27.5	10x8x60			
100	3	2	270	190	220	155	25	15	177	166	100	100	200	345	262	323	50	25	21	7x7x45	75	38	33.5	10x8x70			
120	5	3	320	230	260	180	30	18	230	195	120	120	240	410	292	385	65	30	26	7x7x60	85	45	40.5	12x8x80			
135	7 1/2	5	350	250	290	200	30	18	260	210	135	135	270	470	322	435	75	35	30.5	10x8x70	95	55	50	15x10x90			
155	10	7 1/2	390	280	320	220	30	20	280	241	135	155	290	495	357	502	85	40	35.5	10x8x80	110	60	55	15x10x105			
175	15	10	420	310	350	250	40	22	315	248	140	175	315	540	375	530	85	45	40.5	12x8x80	110	65	59	18x10x105			
200	20	15	420	360	350	290	44	26.5	324	282	175	200	375	587	449	573	95	50	45.5	12x8x90	125	70	63	20x12x120			
225	25	20	470	410	390	330	45	27	375	335	190	225	415	693	523	650	95	55	49	15x10x90	140	80	73	20x12x135			
250	30	25	520	460	440	380	50	27	422	359	200	250	450	781	555	728	110	60	54	15x10x105	155	90	80	24x16x150			
300	40	30	620	450	520	368	55	36	498	387	190	300	490	840	601	864	125	70	63	18x10x120	170	95	85	24x16x160			
350	50	40	700	520	597	432	55	43	570	480	215	350	565	981	735	945	145	80	73	20x12x135	190	115	104	32x20x185			



TB 圖解( Dimension diagram )：

MODEL:TB

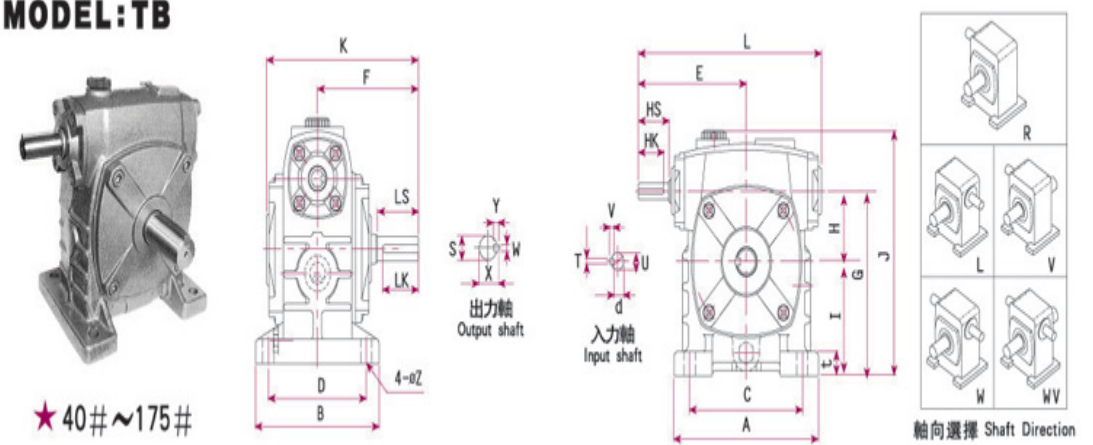


TB 尺寸 (Dimensions)：

尺寸表 Dimension																	單位: m/m									
減速比 RATIO		馬力 HP		腳座 FOOT STOCK					外形尺寸 OUTWARD SIZE								入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT					
型號 MODEL	1/10~ 1/30	1/40~ 1/60	A	B	C	D	t	Z	E	F	G	H	I	J	K	L	HS	U	d	TxVxHK	LS	S	X	WxYxLK		
40	1/8		110	80	89	50	11	9	97	73	93	40	53	125	126	146	30	12	10	4x4x25	30	14	11	5x5x25		
50	1/4	1/8	140	120	110	95	18	11	104	92	130	50	80	180	145	175	30	14	11.5	5x5x25	40	17	14	5x5x35		
60	1/2	1/4	150	130	120	105	20	11	119	111	150	60	90	205	165	195	40	15	12	5x5x35	50	22	18	7x7x45		
70	1	1/2	190	150	150	115	22	15	130	130	175	70	105	245	196	235	40	18	15	5x5x35	60	28	24	7x7x55		
80	2	1	220	170	180	135	23	15	157	145	200	80	120	265	217	265	50	22	18	7x7x45	65	32	27.5	10x8x60		
100	3	2	270	190	220	155	25	15	177	166	250	100	150	330	262	323	50	25	21	7x7x45	75	38	33.5	10x8x70		
120	5	3	320	230	260	180	30	18	230	195	300	120	180	395	292	385	65	30	26	7x7x60	85	45	40.5	12x8x80		
135	7 1/2	5	350	250	290	200	30	18	260	210	350	135	215	455	322	435	75	35	30.5	10x8x70	95	55	50	15x10x90		
155	10	7 1/2	390	280	320	220	30	20	280	241	390	155	235	475	357	502	85	40	35.5	12x8x80	110	60	55	15x10x105		
175	15	10	420	310	350	250	40	22	315	248	435	175	260	530	375	530	85	45	40.5	12x8x80	110	65	59	18x10x105		



TC 圖解 ( Dimension diagram ) :

MODEL:TC

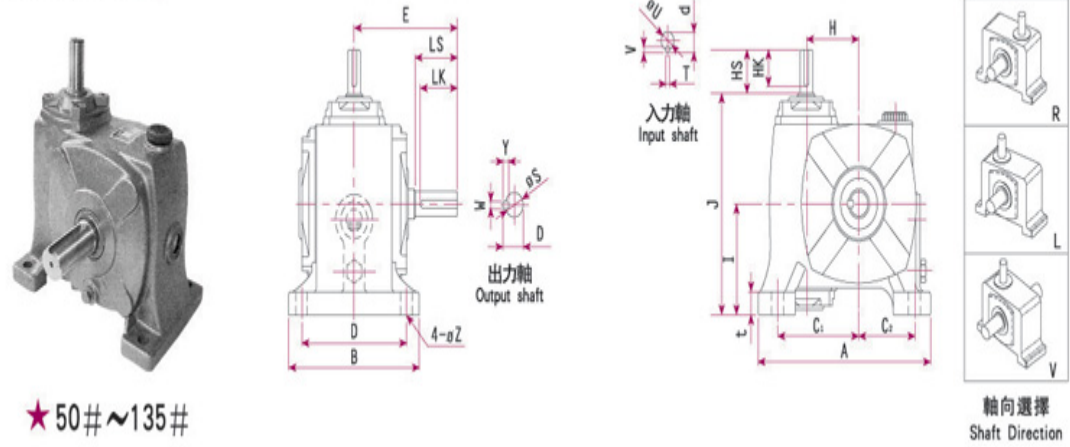

TC 尺寸 ( Dimensions ) :


尺寸表 Dimension

單位: m/m

減速比 RATIO			馬力 HP		腳座 FOOT STOCK							外形尺寸 OUTWARD SIZE				入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT			
型號 MODEL	1/10~ 1/30	1/40~ 1/60	A	B	C1	C2	D	t	Z	E	H	I	J	HS	U	d	T×V×HK	LS	S	X	W×Y×LK		
50	1/4	1/8	161	125	77	53	100	15	11	92	50	76	145	30	14	11.5	5x5x25	40	17	14	5x5x35		
60	1/2	1/4	205	130	98	67	105	20	11	111	60	90	170	40	15	12	5x5x35	50	22	18	7x7x45		
70	1	1/2	230	150	115	75	120	20	15	130	70	95	190	40	18	15	5x5x35	60	28	24	7x7x55		
80	2	1	264	160	125	90	125	20	15	145	80	105	212	50	22	18	7x7x45	65	32	27.5	10x8x60		
100	3	2	310	195	150	100	155	25	15	166	100	135	262	50	25	21	7x7x45	75	38	33.5	10x8x60		
120	5	3	360	230	180	120	180	28	18	175	120	160	326	65	30	26	7x7x60	85	45	40.5	12x8x80		
135	7 1/2	5	390	250	200	130	200	30	18	210	135	170	353	75	35	30.5	10x8x70	95	55	50	15x10x90		



Dimension diagram) :

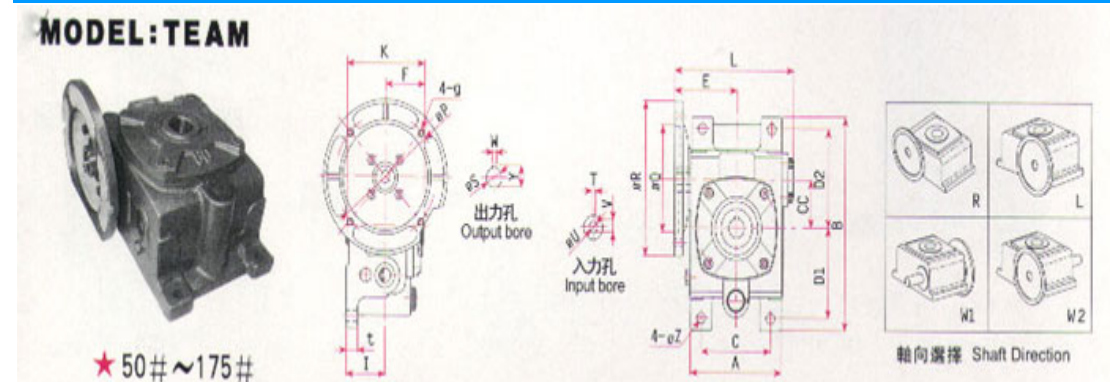

TEAM 尺寸 (Dimensions) :

尺寸表 Dimension

單位: m/m

減速比 RATIO	馬力 HP		腳座 FOOT STOCK								外形尺寸 OUTWARD SIZE								馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE			出力孔 OUTPUT BORE		
			A	B	C	D1	D2	t	Z	E	F	I	K	L	CC	P	Q	R	g	V	T	U	W	Y	S			
型號 MODEL	1/30	1/40~ 1/60																										
50	1/4		120	220	90	93	102	18	11	81	52	50	102	149	50	130	110	160	M8	125	4	11	5	22	20			
60	1/2	1/4	130	262	100	105	120	20	11	86	58	55	113	153	60	130	110	160	M8	126 15	4 5	11 14	7	28	25			
70	1	1/2	160	298	120	120	135	22	15	105	67.5	65	132.5	195	70	130 165	110 130	160 200	M8 M10	16 21.5	5 6	14 19	7	33	30			
80	2	1	180	320	140	130	150	23	15	114	75	70	145	221	80	165	130	200	M10	21.5 27	6 8	19 24	10	38	35			
100	3	2	225	380	190	155	160	25	15	144	91	90	181	276	100	165 215	130 180	200 250	M10 M12	27 31	8	24 28	10	43	40			
120	5	3	266	450	220	185	215	30	18	168	107.5	100	207.5	319	120	215	180	250	M12	31	8	28	12	48	45			
135	7 1/2	5	306	495	260	210	235	30	18	187	113	110	223	362	135	215 265	180 230	250 300	M12	31 41	8 10	28 38	15	60	55			
155	10	7 1/2	350	460	290	145	265	30	20	206	138	140	278	405	155	265	230	300	M12	41	10	38	15	70	65			
175	15	10	385	520	320	167	293	40	22	236	142	150	292	456	175	265 300	230 290	300 350	M12 M15	41 45	10 12	38 42	18	95	90			

以上尺寸如有變動，恕不另行通知  
We regret that there will be no Separate notification, if the above dimensions have been changed.




TE-U 圖解（Dimension diagram）：

MODEL:TEU





★40#~175#

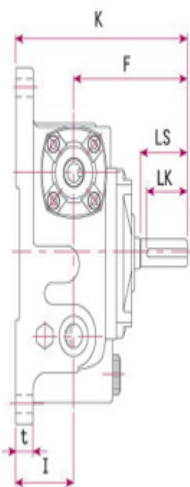

出力軸  
Output shaft

入力軸  
Input shaft

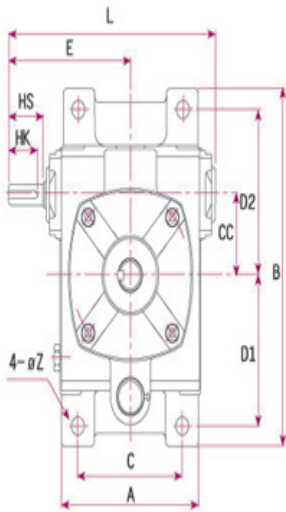

軸向選擇  
Shaft Direction

TE-U 尺寸（Dimensions）：



尺寸表 Dimension

單位：m/m

減速比 RATIO			馬力 HP	腳座 FOOT STOCK						外形尺寸 OUTWARD SIZE						入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT			
型號 MODEL	1/10~ 1/30	1/40~ 1/60		A	B	C	D1	D2	t	Z	E	F	H	I	K	L	HS	U	d	TxVxHK	LS	S	X
40	1/8		94	182	70	75	85	14	9	86	80	40	45	125	139.5	25	12	10	4x4x25	30	14	11	5x5x25
50	1/4		1/8	120	220	90	93	102	18	11	104	92	50	50	142	175	30	14	11.5	5x5x25	40	17	14
60	1/2	1/4	130	262	100	105	120	20	11	119	111	60	55	166	195	40	15	12	5x5x35	50	22	18	7x7x45
70	1	1/2	160	298	120	120	135	22	15	134	130	70	65	195	235	40	18	15	5x5x35	60	28	24	7x7x55
80	2	1	180	320	140	130	150	23	15	157	145	80	70	215	265	50	22	18	7x7x45	65	32	27.5	10x8x60
100	3	2	226	380	190	155	180	25	15	177	166	100	90	265	323	50	25	21	7x7x45	75	38	33.5	10x8x70
120	5	3	266	450	220	185	215	30	18	230	195	120	100	295	385	65	30	26	7x7x60	85	45	40.5	12x8x80
135	7 1/2	5	306	495	260	210	235	30	18	260	210	135	110	320	435	75	35	30.5	10x8x70	95	55	50	15x10x90
155	10	7 1/2	350	460	290	145	265	30	20	280	241	155	140	381	502	85	40	35.5	10x8x80	110	60	55	15x10x105
175	15	10	385	520	320	167	293	40	22	315	248	175	150	398	530	85	45	40.5	12x8x80	110	65	59	18x10x105



## MODEL:TFAM

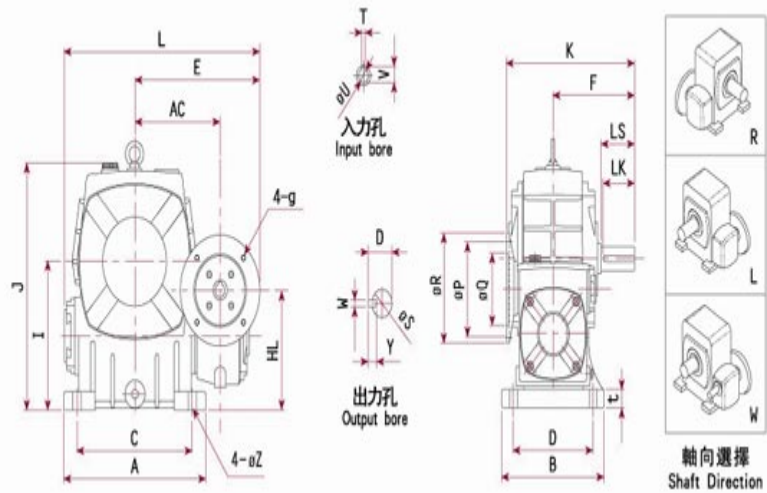

TFAM 尺寸 (Size) :


尺寸表 Dimension

單位: m/m

減速比 RATIO		腳座 FOOT STOCK						外形尺寸 OUTWARD SIZE								馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE			出力軸 OUTPUT SHAFT				
型號 MODEL	馬力 HP	1/100~1/1000 1/900 1/3600	A	B	C	D	t	Z	E	F	I	J	K	L	AC	HL	P	Q	R	g	V	T	U	LS	S	D	WxYxLK
80	1/4		220	170	180	135	23	15	216	145	160	280	221	324	136	130	130	110	160	M8	12.5	4	11	65	32	35.5	10x8x60
100	1/2	1/4	270	190	220	155	25	15	238	166	200	345	256	371	158	160	130	110	160	M8	12.5 16	4 5	11 14	75	38	41.5	10x8x70
120	1	1/2	320	230	260	180	30	18	265 285	195	240	410	291	424 444	185	190	130 165	110 130	160 200	M8 M10	16 21.5	5 6	14 19	85	45	48.5	12x8x80
135	2	1	350	250	290	200	30	18	319	210	270	470	330	500	219	215	165	130	200	M10	21.5 27	6 8	19 24	95	55	60	15x10x90
155	3	2	390	280	320	220	30	20	358 383	241	290	495	397	557 582	258	235	165 215	130 180	200 250	M10 M12	27 31	8	24 28	110	60	65	15x10x105
175	5	3	420	310	350	250	40	22	415	248	315	540	426	645	290	280	215	180	250	M12	31	8	28	110	65	69	18x10x105



## MODEL:TFA

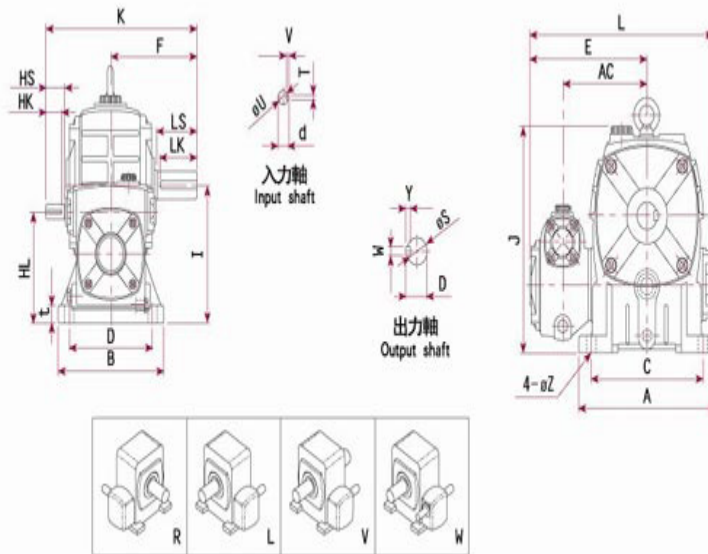

軸向選擇 Shaft Direction

TFA 尺寸 (Size) :


尺寸表 Dimension

單位: m/m

減速比 RATIO		腳座 FOOT STOCK						外形尺寸 OUTWARD SIZE								入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT			
型號 MODEL	馬力 H P 1/100~1/1000 1/900 1/3600	A	B	C	D	t	Z	E	F	I	J	K	L	AC	HL	HS	U	d	TxVxHK	LS	S	D	WxYxLK
60	1/16	150	130	120	105	20	11	144	111	120	210	198	222	100	92	25	12	135	4x4x25	50	22	25	7x7x45
70	1/8	190	150	150	115	22	15	165	130	140	245	216	260	121	110	30	12	14	4x4x25	60	28	31	7x7x55
80	1/4	220	170	180	135	23	15	188	145	160	280	245	295	136	130	30	14	165	5x5x25	65	32	35.5	10x8x60
100	1/2	270	190	220	155	25	15	214	166	200	345	290	346	158	160	40	15	17	5x5x35	75	38	41.5	10x8x70
120	1	320	230	260	180	30	18	248	195	240	410	330	407	185	190	40	18	20	5x5x35	85	45	48.5	12x8x80
135	2	350	250	290	200	30	18	290	210	270	470	375	471	219	215	50	22	25	7x7x45	95	55	60	15x10x90
155	3	390	280	320	220	30	20	348	241	290	495	443	547	258	235	50	25	28	7x7x45	110	60	65	15x10x105
175	5	420	310	350	250	40	22	393	248	315	540	493	623	290	280	65	30	33	7x7x60	110	65	69	18x10x105



## MODEL:TFYM

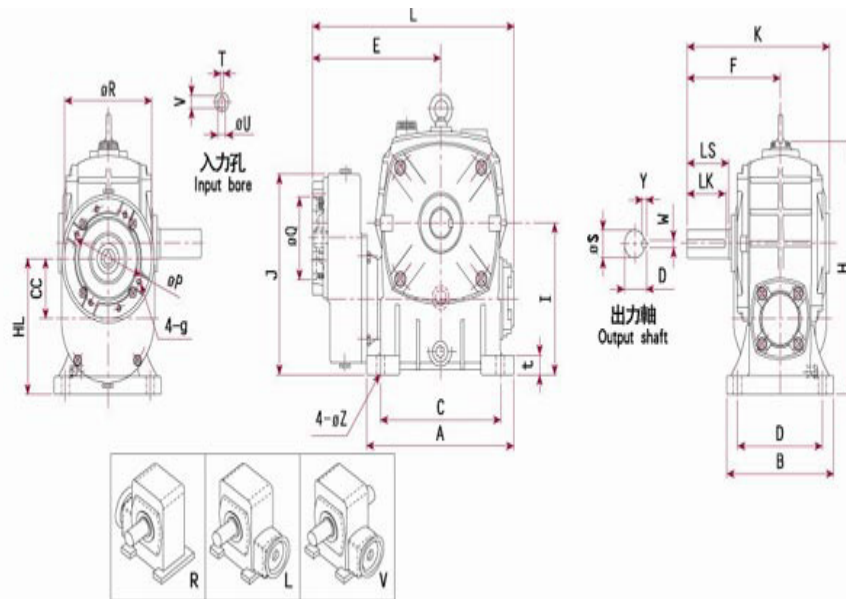

軸向選擇 Shaft Direction

TFYM 尺寸 (Size) :



尺寸表 Dimension

單位: m/m

型號 MODEL	馬力 HP (4P)	減速比 RATIO	腳座 FOOT STOCK							外形尺寸 OUTWARD SIZE										馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE				出力軸 OUTPUT SHAFT			
			A	B	C	D	t	Z	E	F	H	I	J	K	L	CC	HL	P	Q	R	g	V	T	U	LS	S	D	WxYxLK			
80	1/2	80~300	220	170	180	135	23	15	210	145	280	160	245	217	317	80	160	130	110	160	M8	16	5	14	65	32	35.5	10x8x60			
		80~160							216						323			165	130	200	M10	21.5	6	19							
100	1	80~300	270	195	220	155	25	15	241	166	345	200	265	262	376	80	180	165	130	200	M10	21.5	6	19	75	38	41.5	10x8x70			
		80~160							251						386							27	8	24							
120	1	80~300	320	230	260	180	30	18	279	195	410	240	300	292	439	80	200	165	130	200	M10	21.5	6	19	85	45	48.5	12x8x80			
		80~200							289						449							27	8	24							
135	2	80~300	350	250	290	200	30	18	306	210	470	270	353	322	487	92	227	165	130	200	M10	27	8	24	95	55	60	15x10x90			
		80~200																215	180	250	M12	31	8	28							
155	3	80~300	390	280	320	220	30	20	325	241	495	290	353	357	525	92	227	215	180	250	M12	31	8	28	110	60	65	15x10x105			
		80~160																													



# MODEL:TH<sup>U</sup><sub>D</sub>

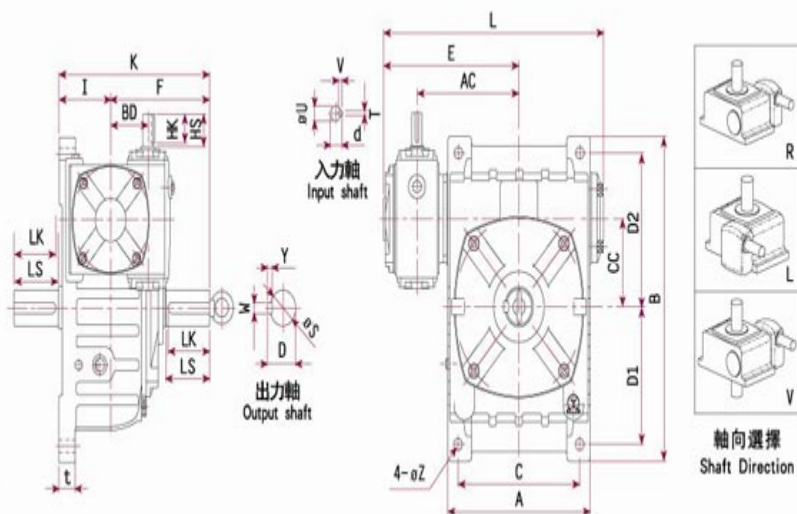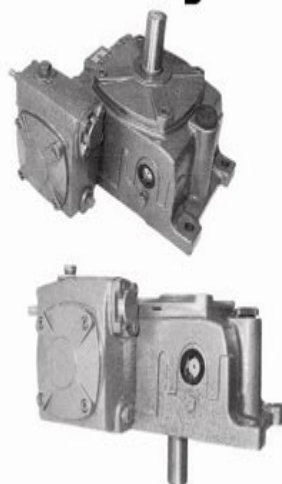

TH-U 尺寸 (Size) :

## 尺寸表 Dimension


單位: m/m

減速比 RATIO		馬力 H P	腳座 FOOT STOCK						外形尺寸 OUTWARD SIZE								入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT				
型號 MODEL	1/100~ 1/900	1/1000~ 1/6000	A	B	C	D1	D2	t	Z	E	F	I	K	L	AC	BD	CC	HS	U	d	TxVxHK	LS	S	D	WxYxLK
60	1/16		130	262	100	105	120	20	11	140	111	55	165	218	100	32	60	25	12	13.5	4x4x25	50	22	25	7x7x45
70	1/8		160	298	120	120	135	22	15	165	130	65	195	260	121	40	70	25	12	14	4x4x25	60	28	31	7x7x55
80	1/4		180	320	140	130	150	23	15	188	145	70	210	295	136	50	80	30	14	16.5	5x5x25	65	32	35.5	10x8x60
100	1/2	1/4	226	380	190	155	180	25	15	214	166	90	260	346	158	60	100	40	15	17	5x5x35	75	38	41.5	10x8x70
120	1	1/2	266	450	220	185	215	30	18	248	195	100	290	407	185	70	120	40	18	20	5x5x35	85	45	48.5	12x8x80
135	2	1	306	495	260	210	235	30	18	292	210	110	324	472	219	80	135	50	22	25	7x7x45	95	55	60	15x10x90
155	3	2	350	460	290	145	265	30	20	348	241	140	393	547	258	100	155	50	25	28	7x7x45	110	60	65	15x10x105
175	5	3	385	520	320	167	293	40	22	393	248	150	412	623	290	120	175	65	30	33	7x7x60	110	65	69	18x10x105



TLD 圖解:

MODEL:TLD

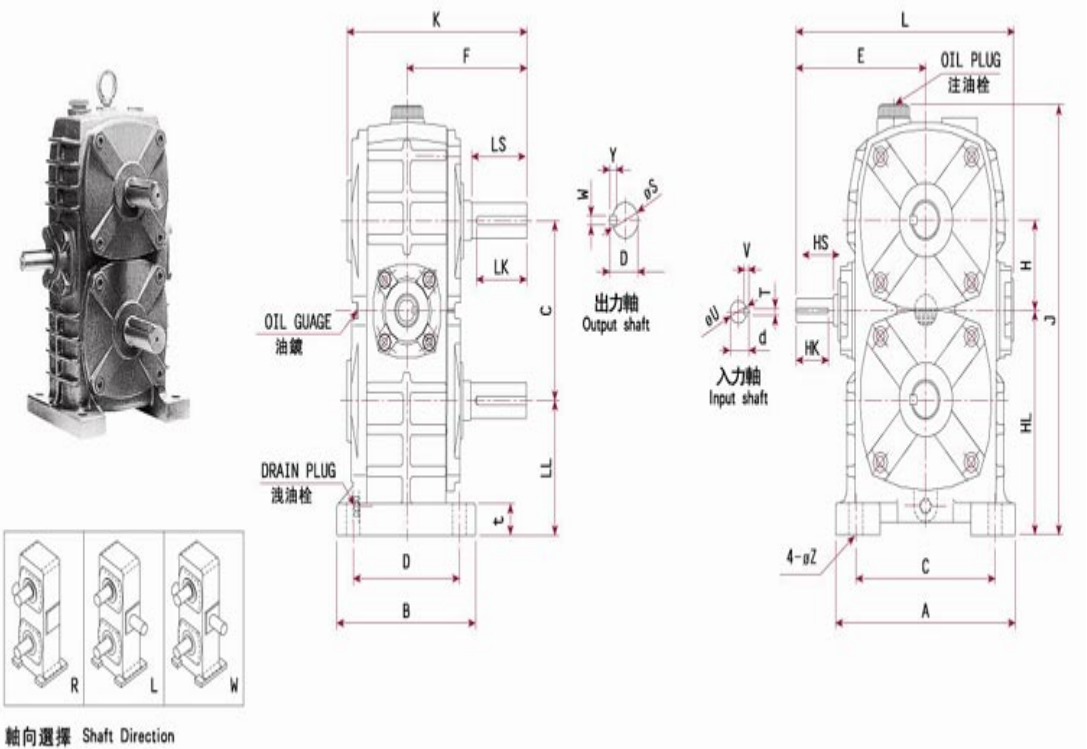

TLD 尺寸（Size）：

尺寸表 Dimension 單位: mm

型號 MODEL	減速比 RATIO	外形尺寸 OUTWARD SIZE																入力軸 INPUT SHAFT				出力軸 OUTPUT SHAFT		
		L	E	AC	AD	K	F	BC	BD	C	H	J	HL	LL	CE	Z	HS	U	T×V	LS	S	W×X		
55	10~60	217	110	120	155	167	110	105	132	110	55	275	155	100	19	13	30	14	7×7	40	17	8×7		
60		260	130	130	184	173	108	136	165	120	60	195	160	100	20	13	40	15	7×7	50	22	8×7		
65		260	130	130	184	173	108	136	162	130	65	300	155	90	25	15	40	15	7×7	50	22	8×8		
70		234	140	150	194	194	129	115	150	140	70	348	175	105	25	15	40	18	7×7	60	28	8×8		
80		268	161	180	220	208	140	135	170	160	80	378	192	112	25	15	50	22	7×7	65	32	10×8		
100		324	190	220	270	258	169	155	197	200	100	472	250	150	27	15	50	25	10×8	75	38	10×8		
120		456	228	260	320	290	186	180	230	240	120	622	300	180	30	18	65	30	10×8	85	45	12×8		
135		516	258	290	350	322	214	200	250	270	135	640	350	215	32	18	75	35	10×8	95	55	15×10		




## TMB 圖解 ( Dimension diagram ) :



### MODEL:TMB



★ 50#~175#

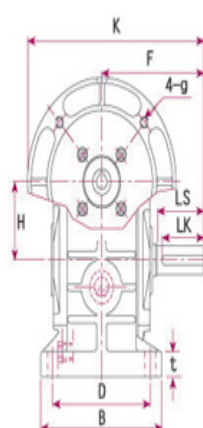

出力軸  
Output shaft

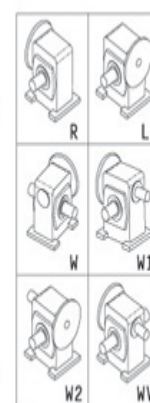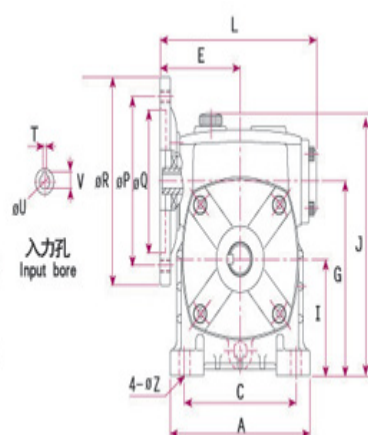

軸向選擇 Shaft Direction

## TMB 尺寸 ( Dimensions ) :

尺寸表 Dimension


單位: m/m

減速比 RATIO			馬力 H P		腳座 FOOT STOCK							外形尺寸 OUTWARD SIZE										馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE			出力軸 OUTPUT SHAFT				
型號 MODEL	1/10~ 1/30	1/40~ 1/60	A	B	C	D	t	Z	E	F	G	H	I	J	K	L	P	Q	R	g	V	T	U	LS	S	X	W	Y	X	L	K		
50	1/4	1/8	140	120	110	95	18	11	81	92	130	50	80	210	175	149	130	110	160	M8	12.5	4	11	40	17	14	5	5	35				
60	1/2	1/4	150	130	120	105	20	11	86	111	150	60	90	230	190	153	130	110	160	M8	12.5 16	4 5	11 14	50	22	18	7	7	45				
70	1	1/2	190	150	150	115	22	15	105	130	175	70	105	255 275	210 230	195	130 165	110 130	160 200	M8 M10	16 21.5	5 6	14 19	60	28	24	7	7	55				
80	2	1	220	170	180	135	23	15	114	145	200	80	120	300	245	221	165	130	200	M10	21.5 27	6 8	19 24	65	32	27.5	10	8	60				
100	3	2	270	190	220	155	25	15	144	166	250	100	150	350 375	270 295	277	165 215	130 180	200 250	M10 M12	27 31	8	24 28	75	38	33.5	10	8	70				
120	5	3	320	230	260	180	30	18	168	195	300	120	180	425	315	319	215	180	250	M12	31	8	28	85	45	40.5	12	8	80				
135	7 1/2	5	350	250	290	200	30	18	187	210	350	135	215	475 500	335 360	362	215 265	180 230	250 300	M12 M12	31 41	8 10	28 38	95	55	50	15	10	90				
155	10	7 1/2	390	280	320	220	30	20	206	241	390	155	235	540	391	406	265	230	300	M12	41	10	38	110	60	55	15	10	105				
175	15	10	420	310	350	250	40	22	236	248	435	175	260	585 610	398 423	456	265 300	230 250	300 350	M12 M16	41 45	10 12	38 42	110	65	59	18	10	105				




Dimension diagram ) :

MODEL:TNC

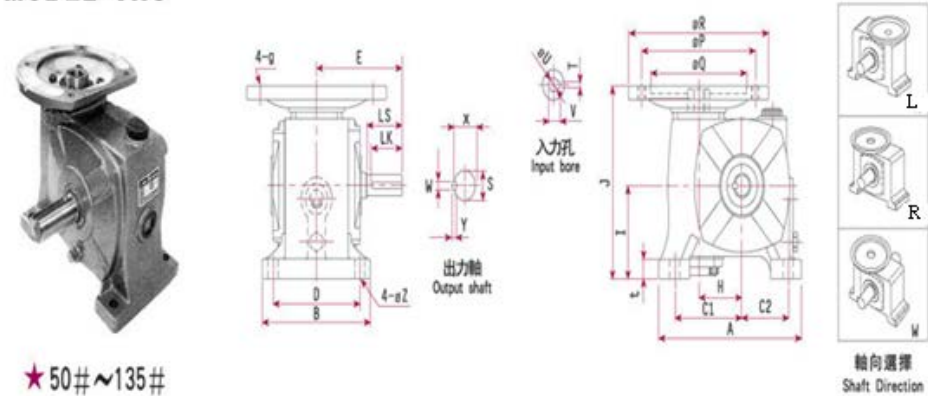

尺寸表 Dimension																			單位: m/m								
減速比 RATIO			馬力 HP		腳座 FOOT STOCK							外形尺寸 OUTWARD SIZE					馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE			出力軸 OUTPUT SHAFT			
					A	B	C1	C2	D	t	Z	E	H	I	J	P	Q	R	g	V	T	U	LS	S	X	WxYxLK	
型號 MODEL	1/10~ 1/30	1/40~ 1/60	50	1/4	1/8	161	125	77	53	100	15	11	92	50	76	163	130	110	160	M8	12.5	4	11	40	17	14	5x5x35
60	1/2	1/4	205	130	98	67	105	20	11	111	60	90	175	130	110	160	M8	12.5 16	4 5	11 14	50	22	18	7x7x45			
70	1	1/2	230	150	115	75	120	20	15	130	70	95	196	130 165	110 130	160 200	M8 M10	16 21.5	5 6	14 19	60	28	24	7x7x55			
80	2	1	264	160	125	90	125	20	15	145	80	105	225	165	130	200	M10	21.5 27	6 8	19 24	65	32	27.5	10x8x60			
100	3	2	310	195	150	100	155	25	15	166	100	135	280	165 215	130 180	200 250	M10 M12	27 31	8	24 28	75	38	33.5	10x8x70			
120	5	3	360	230	180	120	180	28	18	195	120	160	320	215	180	250	M12	31	8	28	85	45	40.5	12x8x80			
135	7 1/2	5	390	250	200	130	200	30	18	210	135	170	353	215 265	180 230	250 300	M12	31 41	8 10	28 38	95	55	50	15x10x90			



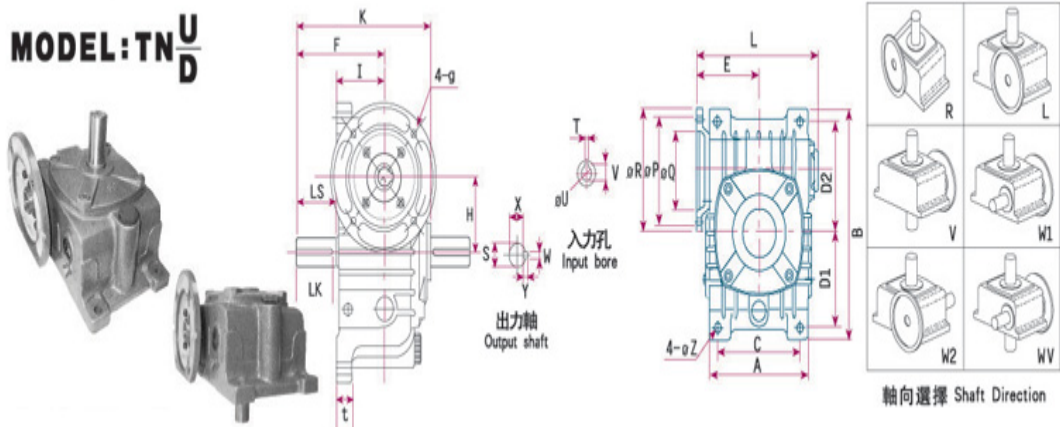

## TN-U 尺寸 (Dimensions) :


尺寸表 Dimension

單位: m/m

減速比 RATIO		馬力 HP		腳座 FOOT STOCK								外形尺寸 OUTWARD SIZE								馬達盤 IEC MOTOR FLANGE				入力孔 INPUT BORE			出力軸 OUTPUT SHAFT			
型號 MODEL	1/10~ 1/30			1/40~ 1/60	A	B	C	D1	D2	t	Z	E	F	H	I	K	L	P	Q	R	g	V	T	U	LS	S	X	WxYxLK		
50	1/4	1/8	120	220	90	93	102	18	11	81	92	50	50	148	149	130	110	160	M8	12.5	4	11	40	17	14	5x5x35				
60	1/2	1/4	130	262	100	105	120	20	11	86	111	60	55	165	153	130	110	160	M8	12.5 16	4 5	11 14	50	22	18	7x7x45				
70	1	1/2	160	298	120	120	135	22	15	105	130	70	65	195	195	130 165	110 130	160 200	M8 M10	16 21.5	5 6	14 19	60	28	24	7x7x55				
80	2	1	180	320	140	130	150	23	15	114	145	80	70	210	221	165	130	200	M10	21.5 27	6 8	19 24	65	32	27.5	10x8x60				
100	3	2	226	380	190	155	180	25	15	144	166	100	90	260	276	165 215	130 180	200 250	M10 M12	27 31	8 8	24 28	75	38	33.5	10x8x70				
120	5	3	266	450	220	185	215	30	18	168	195	120	100	290	319	215	180	250	M12	31	8	28	85	45	40.5	12x8x80				
135	7 1/2	5	306	495	260	210	235	30	18	187	210	135	110	324	362	215 265	180 230	250 300	M12 M12	31 41	8 10	28 38	95	55	50	15x10x90				
155	10	7 1/2	350	460	290	145	265	30	20	206	241	155	140	393	405	265	230	300	M12	41	10	38	110	60	55	15x10x105				
175	15	10	385	520	320	167	293	40	22	236	248	175	150	412	456	265 300	230 250	300 350	M12 M16	41 45	10 12	38 42	110	65	59	18x10x105				



Dimension diagram ) :

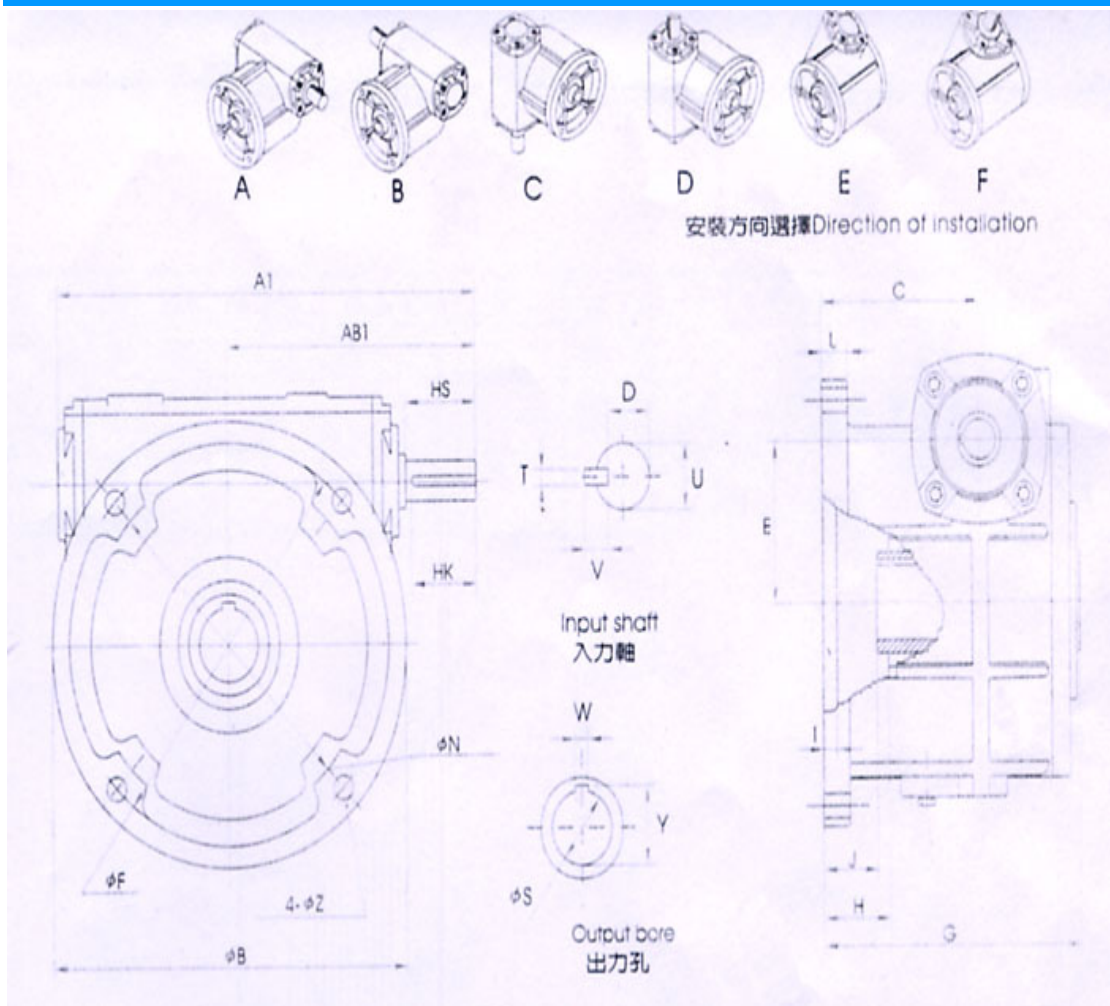




TWA 尺寸 (Dimensions) :

減速比 RATIO		馬力 HP	A1	AB1	B	C	N	E	F	G	H	I	J	L	Z	入力軸 INPUT SHAFT				出力孔 OUTPUT BORE		
																MODEL 型號	1/10- 1/30	1/40- 1/60	HS	U	D	TxVxHK
70	1	1/2	235	140	182	106	115	70	150	168	45	8	40	17	15	40	18	15	5x5x35	7	28	25
80	2	1	268	161	200	107	130	80	170	181	34	8	33	20	15	50	22	18	7x7x45	10	38	35
100	3	2	322	190	248	132	180	100	215	205	55	8	48	22	15	50	25	21	7x7x45	10	43	40



diagram) :

MODEL:TYB

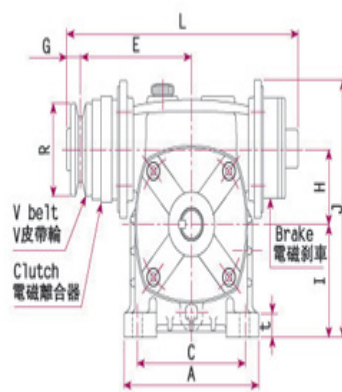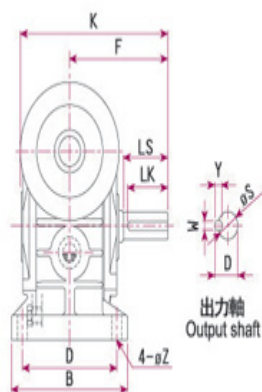


電磁剎車/離合器定格電壓DC 24V

TYB 尺寸 (Dimensions) :

尺寸表 Dimension																			單位: m/m						
型號 MODEL	容量 KG	馬力 HP	減速比 RATIO	腳座 FOOT STOCK								外形尺寸 OUTWARD SIZE										出力軸 OUTPUT SHAFT			
				A	B	C	D	t	Z	E	F	G	H	I	J	K	L	R	LS	S	D	WxYxLK			
50	0.6	1/4	10~30	140	120	110	95	18	11	108	98	20	50	80	180	149	226	76	40	17	19	5x5x35			
60	0.6		40~60	150	130	120	105	20	11	116	110	20	60	90	190	164	250	76	50	22	25	7x7x45			
60	1.5	1/2	10~30	150	130	120	105	20	11	119	110	20	60	90	205	164	254	102	50	22	25	7x7x45			
70	1.5		40~60	190	150	150	115	22	15	132	130	20	70	105	230	193	287	102	60	28	31	7x7x55			
70	2.5	1	10~30	190	150	150	115	22	15	145	130	23	70	105	238	193	322	127	60	28	31	7x7x55			
80	2.5		40~60	220	170	180	135	23	15	152	140	23	80	120	270	210	338	127	65	32	35.5	10x8x60			
80	2.5	2	10~30	220	170	180	135	23	15	152	140	23	80	120	270	210	338	127	65	32	35.5	10x8x60			
100	5	2	40~60	270	190	220	155	25	15	214	170	23	100	150	332	260	419	127	75	38	41.5	10x8x70			
100	5	3	10~30	270	190	220	155	25	15	214	170	23	100	150	332	260	419	127	75	38	41.5	10x8x70			
120	8	3 5	40~60 10~30	320	230	260	180	30	18	227	190	32	120	180	405	315	504	210	85	45	48.5	12x8x80			



BR 無段:

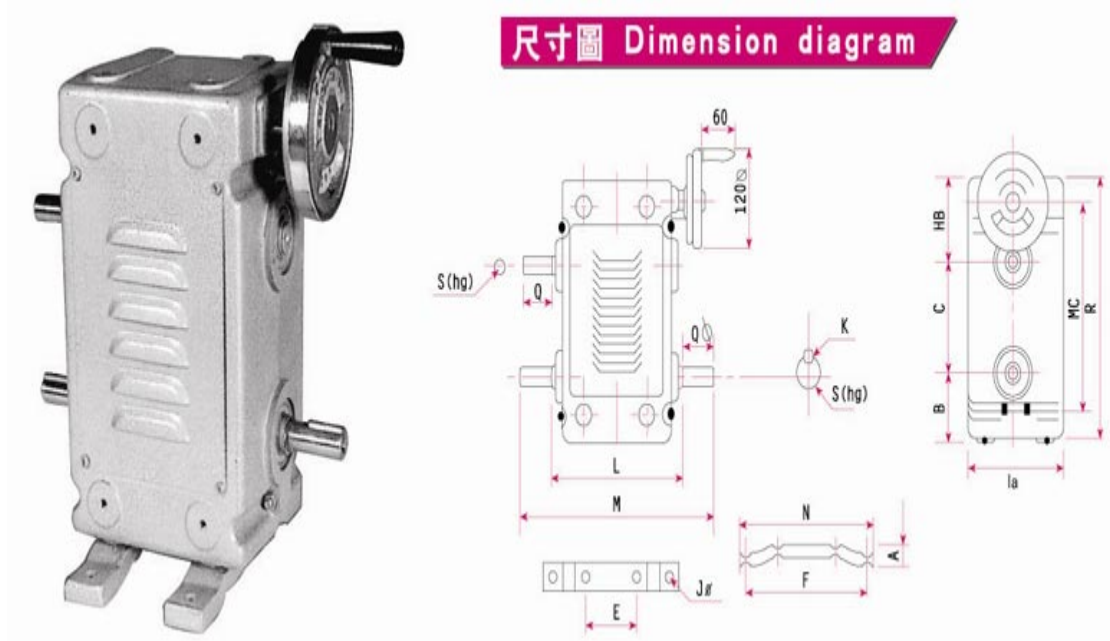


BR 无段 尺寸（Dimensions）：

尺寸表 Dimension

Size	Motor HP	N	C	la	F	R	A	MC	Q	L	S∅	B	J∅	M	K	E	HB
0.5	$\frac{1}{2}$	216	122	146	186	294	19	232	40	173	17	72	12	265	5x5	90	100
1	1	240	129	155	210	309	22	245	50	197	20	76.5	13	310	5x5	100	103.5
2	2	260	147	172	230	350	24	280	60	210	25	87.5	14	335	7x7	110	115.5
3	3	290	171	198	260	400	24	312	70	238	30	100	14	390	7x7	126	129



BS 無段圖解:

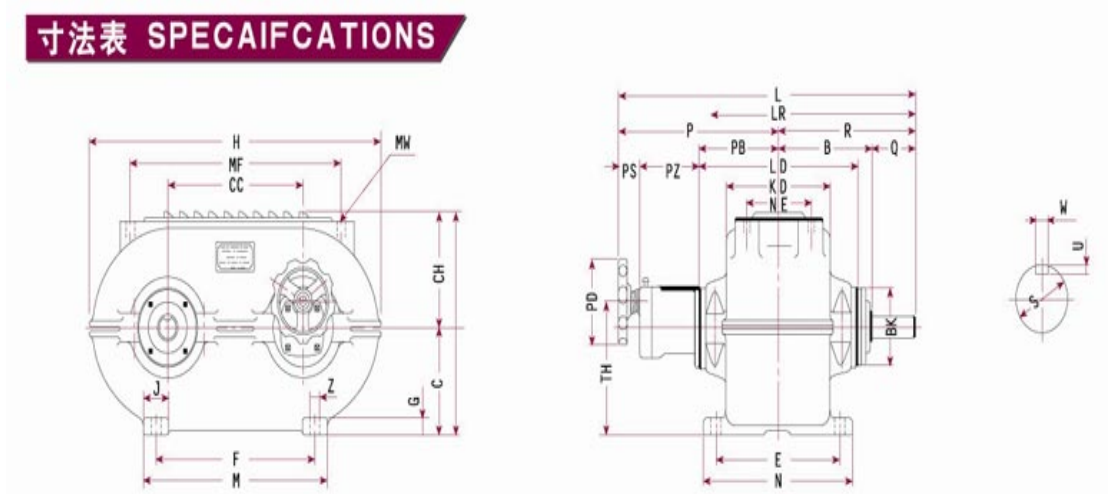

BS 尺寸 (Size) :

PS	L	Q	B	PB	PZ	PS	LR	CC	NE	MF	MW	I	C	CH	J	Z	G	H
1/4	325	40	91	77	59	36	201	123	54	160	W3/8	148	72	76	24	10	12	260
1/2	378	50	118	97	85	36	265	160	80	205	W3/8	191	95	96	32	11	18	347
1	402	55	129	107	85	34	291	170	80	224	W3/8	211	104	107	32	11	20	376
2	482	70	151	129	100	32	350	222	97	342	W1/2	265	130	135	45	14	20	480
3	482	70	151	129	100	32	350	222	97	342	W1/2	265	130	135	45	14	20	480
5	573	80	183	157.5	120	32.5	420.5	280	125	390	W5/8	329	164	164	50	15	25	585

PS	M	F	N	E	P	R	LD	KD	BK	PD	TH	S	W	U	帶幅 Bolt
1/4	194	170	150	130	172	131	155	100	77	100	100	16	5	2.5	25
1/2	220	192	195	164	210	168	194	136	88	100	130	20	5	2.5	31
1	270	238	206	174	218	184	214	142	88	100	139	22	5	2.5	35
2	310	265	250	215	261	221	258	170	98	100	163	27	8	4	41
3	310	265	250	215	261	221	258	170	98	100	163	27	8	4	50
5	355	305	300	255	310	263	315	202	125	125	212	35	8	4	52