



馬達搭配減速機


6W

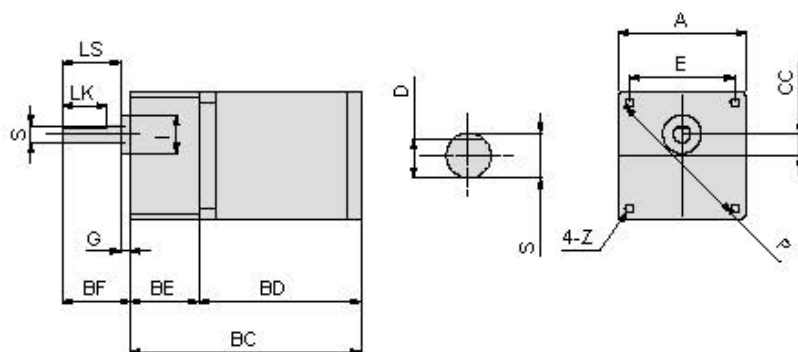

15W-40W

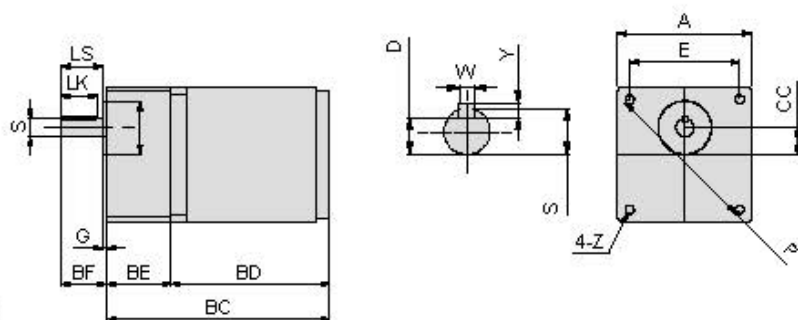

60W

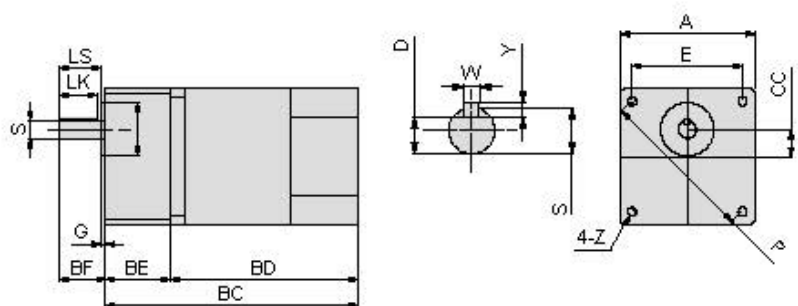


尺寸表 (mm)

型號	馬力 (w)	比數	A	BC	BE	BD	BF	CC	I	G	P	Z	E	軸端			
														LS	S	D	W×Y×LK
2	6W (GN)	3~18	60	108	32	76	32	10	18	4.5	70	4.4	49.5	27.5	8	7	--
		20~180		118	42												
3	15W (GN)	3~18	70	112	32	80	32	15	30	3	82	5.5	58	29	10	7.5	4×4×25
		20~180		122	42												
4	25W (GN)	3~18	80	122	36	86	32	15	34	2.5	94	5.5	66.5	29.5	10	7.5	4×4×25
		20~180		136	50												
5	40W (GN)	3~18	90	149	43	106	32	18	34	2.5	104	6.4	73.6	29.5	12	9.5	4×4×25
		20~180		165	59												
	60W (GN)	3~18	90	168	43	125	32	18	34	2.5	104	6.4	73.6	29.5	12	9.5	4×4×25
		20~180		184	59												

※ RK: 30分鐘額定時間。

馬達搭配減速機

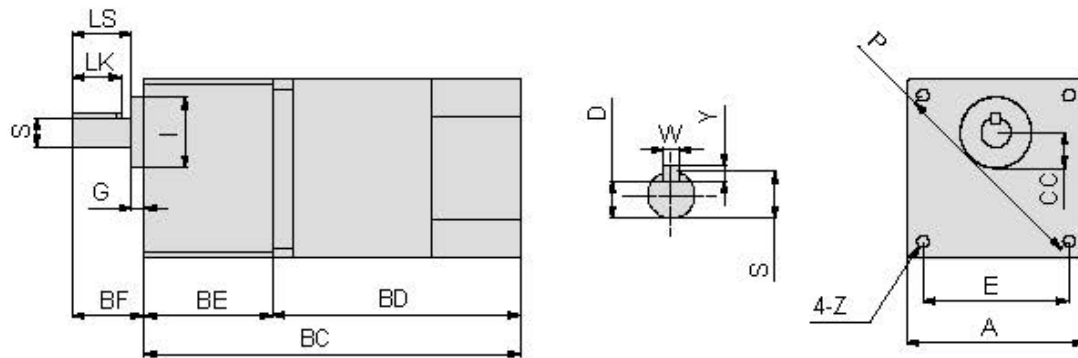


尺寸表 (mm)

型號	馬力 (w)	A	BC	BE	BD	BF	CC	I	G	P	Z	E	軸端			
													LS	S	D	W×Y×LK
5 (GU)	60W	90	190	65	125	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25
	90W	90	213	65	148	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25
	120W	90	213	65	148	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25


※ RK : 30 分鐘額定時間。

L 形腳架


PAL-3N(70mm 用)

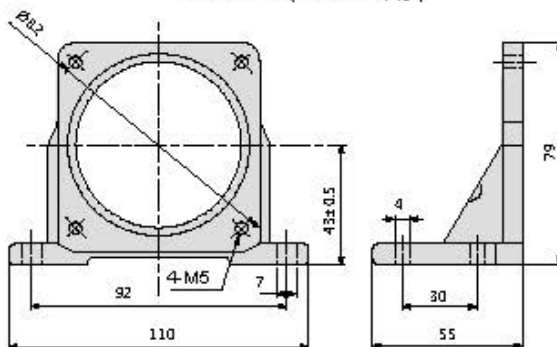




PAL-4N(80mm 用)

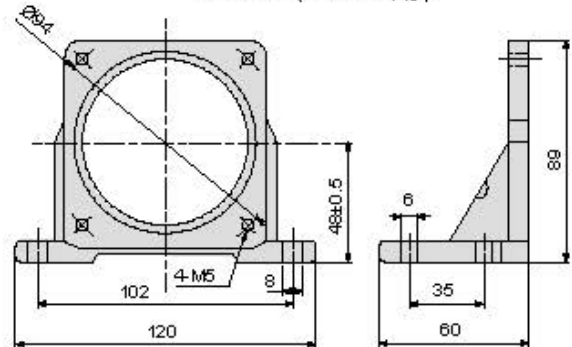




PAL-5N(90mm 用)

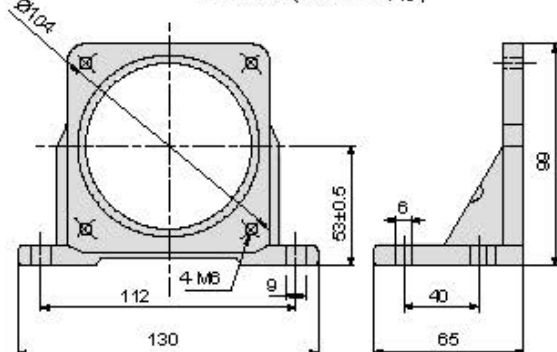

減速機

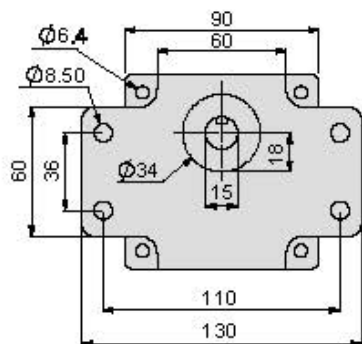

有耳 (GU 選用)

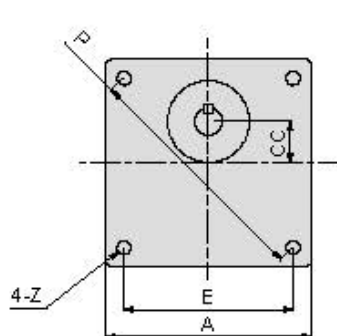



四角形 (GN、GU 選用)

尺寸表 (mm)

型號	馬力 (w)	比較	A	BC	BD	BE	CC	I	G	P	Z	E	軸 端				重量 (KG)
													LS	S	D	W×Y×LK	
2	6W (GN)	3~18	60	64	32	32	10	18	4.5	70	4.4	49.5	27.5	8	7	--	0.34
		20~180		74	42												0.39
3	15W (GN)	3~18	70	64	32	32	15	30	3	82	5.5	58	30	10	7.5	4×4×25	0.52
		20~180		74	42												0.58
4	25W (GN)	3~18	80	68	36	32	15	34	2.5	94	5.5	66.5	29.5	10	7.5	4×4×25	0.66
		20~180		82	50												0.81
5	40W (GN)	3~18	90	74	43	32	18	34	2.5	104	6.4	73.6	28.5	12	9.5	4×4×25	1.2
		20~180		90	59												1.4
	60W (GN)	3~18	90	74	43	32	18	34	2.5	104	6.4	73.6	28.5	12	9.5	4×4×25	1.2
		20~180		90	59												1.4
	60W (GU)	3~18	90	101	65	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25	1.2
		20~180		101	65												1.4
	90W (GU)	3~18	90	101	65	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25	1.2
		20~180		101	65												1.4
	120W (GU)	3~18	90	101	65	36	18	34	6	104	6.4	73.6	30	15	12	5×5×25	1.2
		20~180		101	65												1.4

1:10

若單一減速機無法得到所需的減速比時，可考慮加裝一個或多個減速機，來獲得更大的減速比。

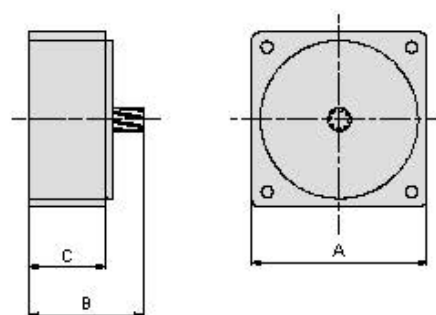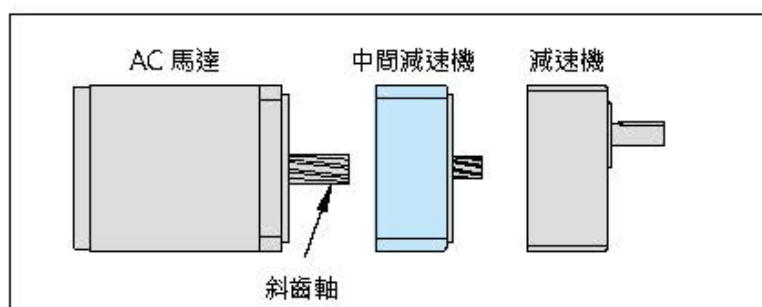

一般規格

項目	規格
減速比	1:10 之中間減速機
安裝尺寸	型號 2、3、4、5

尺寸表 (mm)

型號	馬力 (w)	A	B	C
2	6W	60	39	26
3	15W	70	39	26
4	25W	80	39	26
5	GN 40W~60W	90	59	40
	GU 60W~120W	90	59	40

直接連結減速馬達時 之容許轉矩

60Hz 最大容許轉矩 (Kgcm)

輸出 功率 (W)	減 速 比 (R)	3	5	6	7.5	9	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180
	轉 速 (rpm)	600	360	300	240	200	144	120	100	90	72	60	50	36	30	24	20	18	15	12	10
6W	扭 力 (T)	1.0	1.5	1.8	2.3	2.8	3.9	4.7	5.6	6.2	7.0	8.3	10	13.8	16	20	24	30	30	30	30
15W		2.6	3.9	4.7	5.8	7.0	9.8	11.8	15	17	19	23	27.6	38.4	46	50	50	50	50	50	50
25W		4.1	6.3	7.6	9.5	11.4	16	19	23	26	31	37	45	62	75	80	80	80	80	80	80
40W		6.3	10	12	15	19	26	30	37	41	45	54	65	90	100	100	100	100	100	100	100
60W		10	16	19	24	28	40	47	55	61	69	83	100	138	160	175	200	200	200	200	200
90W		14	24	28	35	42	60	70	80	89	103	124	149	200	200	200	200	200	200	200	200
120W		19	30	37	46	55	70	83	100	129	125	150	180	200	200	200	200	200	200	200	200

※ RK: 30 分鐘額定時間。 □ 120W 以上 30 分鐘額定

50Hz 最大容許轉矩 (Kgcm)

輸出 功率 (W)	減 速 比 (R)	3	5	6	7.5	9	12.5	15	18	20	25	30	36	50	60	75	90	100	120	150	180
	轉 速 (rpm)	500	300	250	200	166	120	100	83	75	60	50	42	30	25	20	17	15	12.5	10	8.3
6W	扭 力 (T)	1.2	1.9	2.3	2.9	3.4	4.7	5.7	6.8	7.6	9.3	11	13	16	20	24	30	30	30	30	30
15W		3.0	4.7	5.7	7.1	8.5	11.8	14.2	18	20	23	28	33	46	50	50	50	50	50	50	50
25W		5.0	7.8	9.4	11.8	14.1	19.6	23	28	31	38	46	55	76	80	80	80	80	80	80	80
40W		7.3	12	14.7	18	22	30	36	43	48	54	65	77	100	100	100	100	100	100	100	100
60W		12	19	22	28	34	48	55	62	69	82	98	118	164	196	200	200	200	200	200	200
90W		17	28	34	43	51	67	80	96	107	125	150	178	200	200	200	200	200	200	200	200
120W		24	40	48	60	71	89	107	129	143	162	194	200	200	200	200	200	200	200	200	200

※ RK: 30 分鐘額定時間。